




TEAC®

UR-50BD

High-Definition Medical Image Recorder



Now You Can Record High Definition Video from Medical Imaging Modalities
with the Most Compatible Formats Available

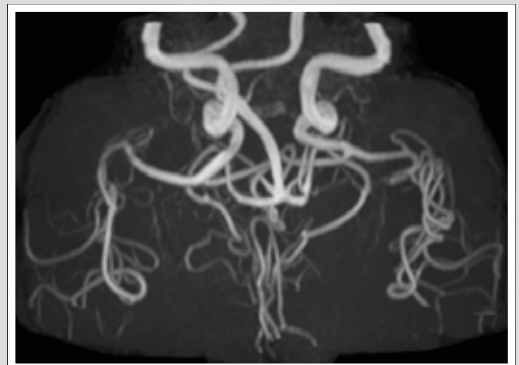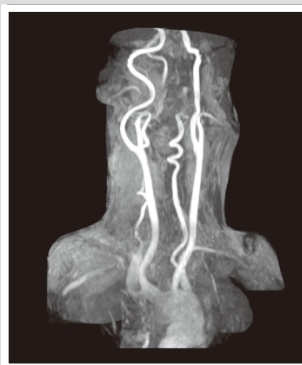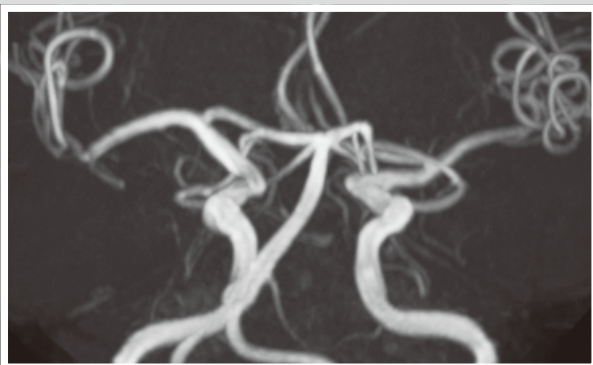

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

Based on decades of experience in medical imaging and recording, TEAC introduces the UR-50BD Medical Video Recorder, the best solution for undiluted high-definition medical recording. The UR-50BD features real-time recording of HD digital and industry standard NTSC/PAL video via the broadest support of inputs/outputs on the market (HDMI, DVI, S-Video, and BNC) with the widest range of formats currently available (BluRay, CD/DVD, HDD, and USB memory stick).

Excellent quality recording provided by TEAC UR-50BD maximizes the efficiency of studies.

Features


- Real-Time Direct Recording to Removable Media (Blu-Ray™/DVD, USB Flash, USB Hard Drive, etc.)
- All-in-One Unit with No PC Required.
- High-Resolution Data Archiving via DVI (& HDMI).
- Hard Disk Drive (HDD) Embedded for the Data Backup.
- The Backed-Up Data (50GB x 2) on HDD Inside Can Be Retrieved to Removable Media for the Inexpensive (Digital File) Distribution of the Patient Study and Report.
- Recorded Data to Removable Media is STB and PC Compatible.
- Front Panel USB Port Provides Easy Access for USB Memory/USB HDD.
- RS-232C and USB Control.



Title Menu



Connection, Definition and Media

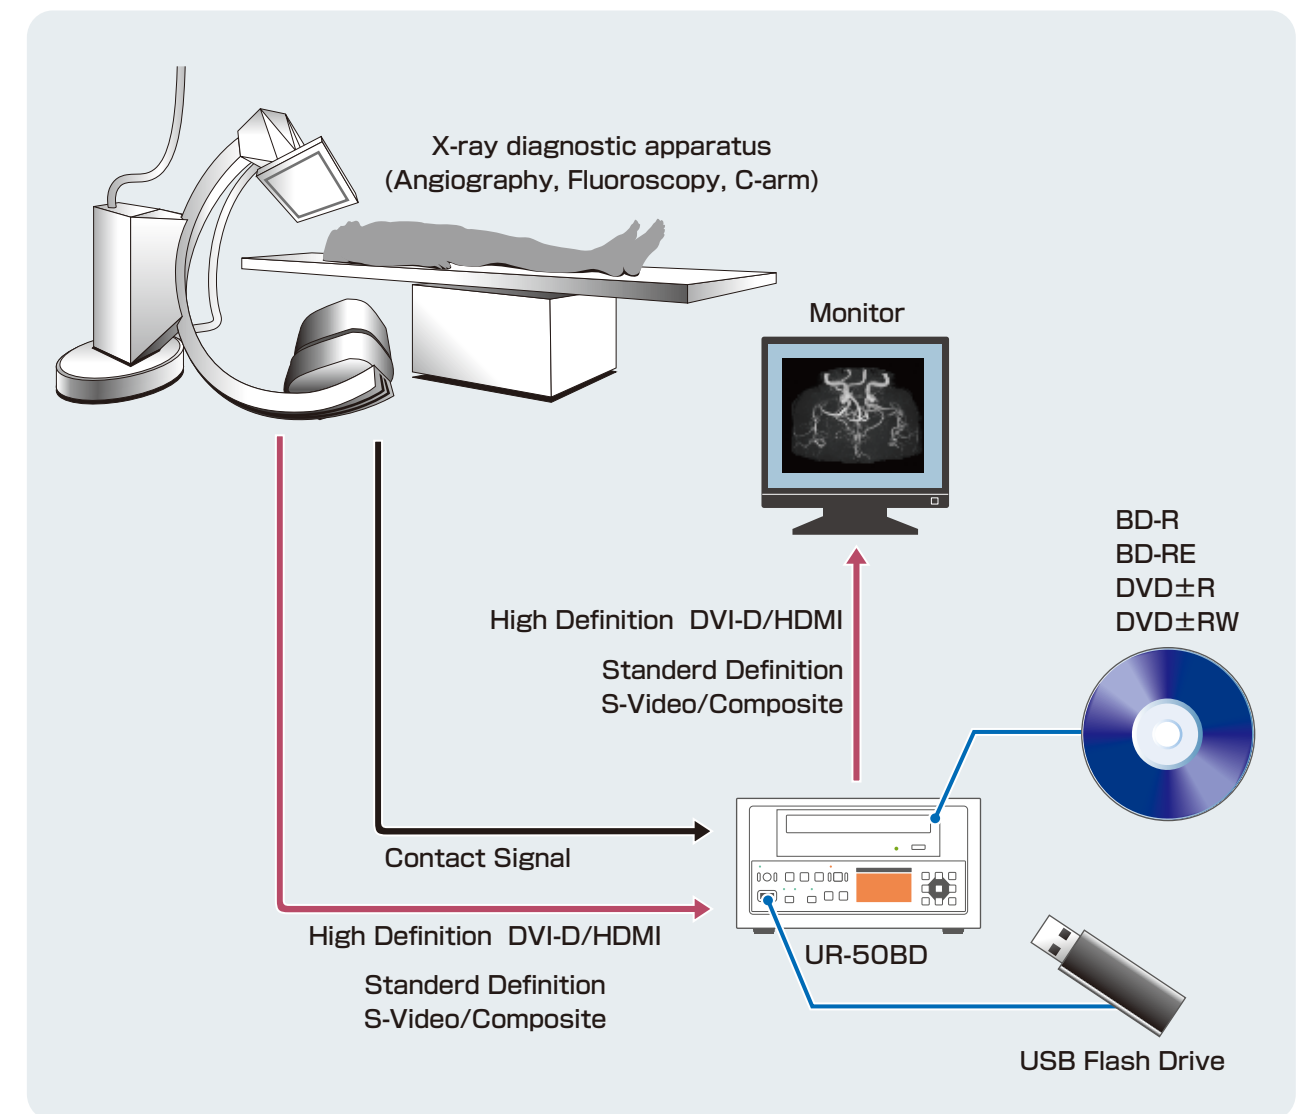

Recording Format

Input Format	Recording Format
NTSC	Full D1 720 x 480
PAL	Full D1 720 x 480
SVGA 800 x 600	720P 1280 x 720
960 x 720	720P 1280 x 720
XGA 1024 x 768	720P 1280 x 720
Quad-VGA 1280 x 960	1080i 1920 x 1080

Input Format	Recording Format
SXGA 1280 x 1024	1080i 1920 x 1080
1600 x 900 *	1080i 1920 x 1080
WSXGA+ 1680 x 1050	1080i 1920 x 1080
1080i 1920 x 1080	1080i 1920 x 1080
1080p 1920 x 1080	1080i 1920 x 1080

* This is an option. It is possible to add the resolution instead of SXGA.

UR-50BD Specifications

Recordable media		
USB Flash Drive/ USB HDD	NTSC/PAL input	DVD-Video
	High-Definition	BDAV
	Recordable capacity	Max. 2 TB
DVD Disc	NTSC/PAL input	
	DVD-R, DVD-RW	DVD-Video
	DVD+R, DVD+RW	DVD-Video
	Recordable capacity	Max. 8.5 GB (DL Disc)
BD Disc	High-Definition	
	BD-R, BD-RE	BDAV
	Recordable capacity	Max. 50 GB (DL Disc)
Internal hard disk drive		
100 GB		
Recording format		
NTSC/PAL	MPEG2 PS	DVD-Video
High-Definition	MPEG2 TS	BDAV
	H.264	BDAV
Input for Video/Audio		
NTSC/PAL	BNC	1 Vp-p 75 Ω
	S-VIDEO	1 Vp-p 75 Ω Luminance
		NTSC: 0.273 Vp-p 75 Ω Chrominance PAL: 0.3 Vp-p 75 Ω Chrominance
High-Definition	HDMI	
	DVI-D	
Audio	RCA	-8 dBs min 10 kΩ, unbalanced
	HDMI	with Video Input
Output for Video/Audio		
NTSC/PAL	BNC	1 Vp-p 75 Ω
	S-VIDEO	1 Vp-p 75 Ω Luminance
		NTSC: 0.273 Vp-p 75 Ω Chrominance PAL: 0.3 Vp-p 75 Ω Chrominance
High-Definition	HDMI	
	DVI-D	
Audio	RCA	-8 dBs 1 kΩ, unbalanced
	HDMI	with Video Output (two channels)
Audio format		
NTSC/PAL	AC-3 RCA Analog	
High-Definition	AC-3 RCA Analog / HDMI	
Sampling	48 kHz / 16 bits	
Power supply		
AC adapter	Input	100 to 230 VAC 50/60 Hz
	Output	+15 VDC 60 Wmax
Dimensions		
Approx. 8 1/2 W x 4 5/8 H x 11 3/8 D in (214 W x 117 H x 290 D mm)		
Weight		
Approx. 8.8 lb (4.7 kg)		
Environmental condition		
Operating temperature	41 to 104 deg F (5 to 40 deg C)	
Storage temperature	-4 to 140 deg F (-20 to 60 deg C)	
Operating humidity	5 to 80% (No condensation)	
Interface		
RS-232C / USB (Virtual Serial Port)		
10BASE-T / 100BASE-TX		
External input		
mini jack (for external trigger)		
Medical standard		
Safety	IEC6060-1, CSA60601-1, EN60601-1	
EMC	IEC60601-1-2, CSA60601-1-2, EN60601-1-2	
	FCC class B, VCCI class B	
Certifications	CSA NTRL/N	
	CE Mark	
	FCC Class B	



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

DVD Logo is a trademark of DVD Format/Logo Licensing Corporation.

"Blu-ray™ Disc", "Blu-ray™" and "Blu-ray™ Disc" logo are trademarks of Blu-ray™ Disc Association.

Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners.

*Features and specifications are subject to change without notice.

TEAC CORPORATION

Information Products Division

1-47 Ochiai, Tama-shi, Tokyo 206-8530, Japan
Phone:+81-42-356-9160 Fax:+81-42-356-9185
<http://www.teac.co.jp>

TEAC AMERICA, Inc.

7733 Telegraph Road, Montebello, California, 90640, U.S.A.
Phone:+1-323-726-0303 Fax:+1-323-727-7656
<http://www.teac.com>
Email: Datastorage@teac.com

TEAC EUROPE GmbH

Bahnstrasse 12, 65205 Wiesbaden-Erbenheim, Germany
Phone:+49-611-7158-0 Fax:+49-611-7158-393
<http://www.teac.eu>